


Advertising Power Station Manual



Please read this manual before you use this product and keep it in a safe place for future reference.


PRODUCT FEATURES:

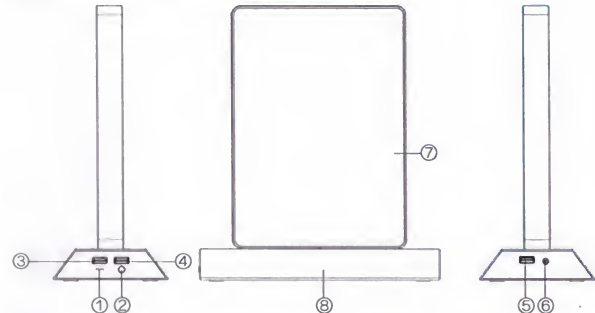

1. LED Power Indicator
2. ON/OFF Button
3. USB 1: Output (DC 5V 2.1A)
4. USB 2: Output QC3.0 (DC 5V--12V)
5. USB 3: Output (DC 5V 2.1A)
6. Input: DC12V-2A
7. LED Advertisement Backlight
8. DOCK

Charge for Power Station

Connect AC Charging Adapter with the input port of product, insert the other terminal into a household socket.

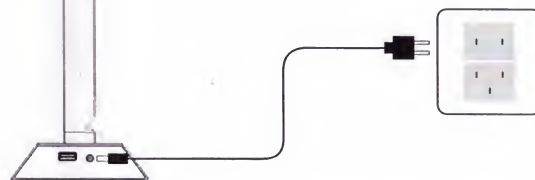

LED Battery Indicator:



1. Low Battery: 1 LED Indicator light flashing;
2. Charging Status: 1 light means 25%, 2 lights means 50%, and so on, till all lights on.
3. Full charged: Keep charging at least 3-4 hours till all 4 lights on
- ※ In status of charging, no other functions can be used except LED flashlight.
- ※ Please take off AC adapter after charging.

Advertisement light and How to Replace the AD paper

AD Paper specification:

- (a) Size: 149*231mm A5
- (b) Material: 128-157g Coated Paper/Light film

1. Please make sure the AD Power Bank is full charged.
2. Turn off the AD light of AD power bank;
3. Take off the sealing strip on the bottom of the AD power bank;
4. Pull out the samples, and then insert your AD papers into the gaps between the glass and light board on bottom;
5. Cover the seal strip.

Advertisement LED Backlight:

press on/off button 3 seconds to turn on the Advertisement light

Charge the Mobile and tablets:

1. Push the On/Off button once on the side of AD power bank to turn on the power.
2. Choose the right charge or sync cable for your mobile phone or tablets.
3. Insert the male USB connector into the USB output with 5V-2.1A or QC3.0 on the side of AD powerbank and start charging.
4. After finish charging, pull out your USB cable and put you mobile and cable away.

*If there is no operation or charge and recharge in 30 seconds, the AD power bank will turn off automatically.

Production Specification

Model	BRS-161
Name	Advertisement Power Bank
LED Backlight	4W
Input	DC 12V/2A-24W
Output1	DC 5V/2.1A
Output2	DC QC3.0 (5V/2A-12V1.5A)
Output3	DC 5V/2.1A
Capacity	18000mAh
Charging time	Approximate 3 hours *Charge time will be depending on the Battery,Cable,Adapter,and Environment
Operation temperature	Approximate -20--60°C
Battery	A grade 18650 Li-Ion battery(□)
Dimension	212 mm × 12mm × 236mm
Main body weight	1000 g

*Specification may change due to product and quality improvement, detailed information is in accordance with the actual product.

*Pictures here are for reference, detailed information is in accordance with the actual product.

Caution:

1. Please don't collision or drop to avoid the product breakdown;
2. Can not guarantee any trouble or damage during the improper operation, please understanding;
3. Please do not put this product in water, wet, steam, dust, oil fume or high temperature, it may result in fire, electric shock or trouble.
4. Please do not put the product in burning sun, or in the car with burning sun, and it may cause the battery leakage or cracked and even caused fire.

Warranty:

* Warranty with in one year from the date delivered from the factory(except the accessories).

* Note: Warranty will not be provided in case of the following circumstances.

1. Operation against the guide or any damaged by modification or repair.
2. After customer purchase, the failures and damaged by improper transport
3. The damage caused by fire, flood, abnormal voltage, other natural disasters and secondary product damage.
4. The surface damage,color fading,stains in using and improper storage.

*We do not provide on-site service, if any questions please contact us, please understand, thank you!